


SMS Flame Retardant



Applications

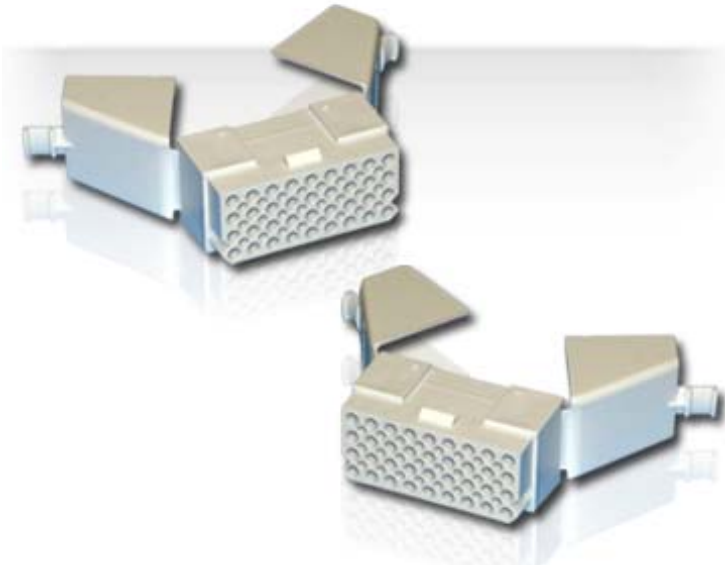

Typical applications for the *SMS Flame Retardant connector* are Railway equipments in passengers compartments, driver cabin and electrical operating areas.

Please contact us for specific requirements

Features & Benefits

- Fire & smoke specifications : Requirement II / I3F2 according to NFF16101/16102 standards – and UL94V0

→ Suitable for indoor Railway applications

- Compact & up to 36 contacts

→ Ideal for tight space integration & for high density contact applications

- 500 matings / unmatings

→ Excellent durability



- RoHS compliant

→ Respect for environment



- Souriau's offer :

- 10 layouts available, from 2 up to 36 TRIM TRIO® #16 contacts
- 2 versions: with integrated strain relief hood or without
- Possibility of keying system

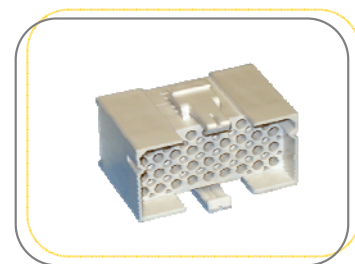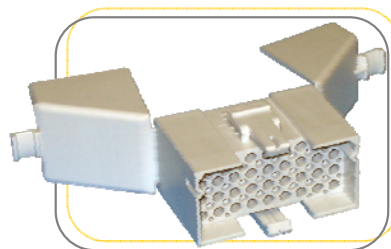

For ordering information & technical data, please [click here](#)