


PROTECTIVE CAP

OPTICAL FERRULE

SPRING

BAYONET BOOT

MASS TYPE L ± 10%	1.5 g
----------------------	-------

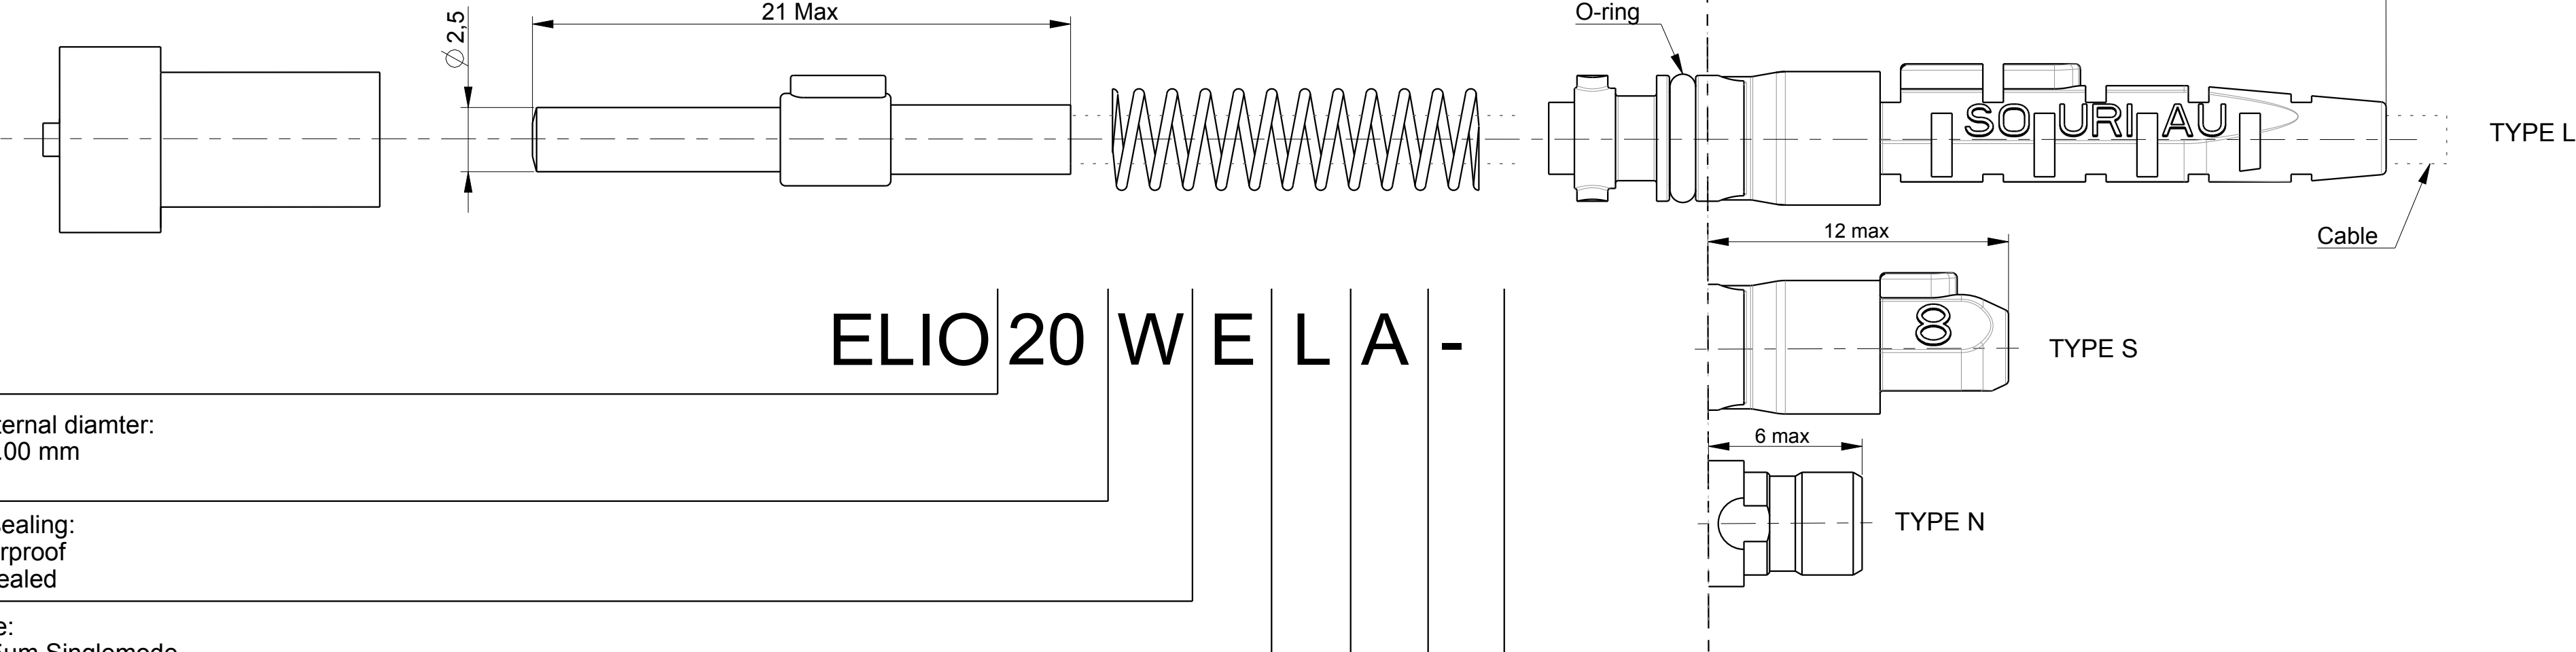

Cable external diamter:
20: $\varnothing$ 2.00 mm

Contact sealing:
W: waterproof
N: not sealed

Fibre type:
E: 9/125µm Singlemode

Boot type:
L: Long boot
S: Short boot
N: No boot (not sealed version only)

Contact version index

Packaging:
:x1
C :x100 (each item packed by 100 in separate plastic bag)

TYPE L and TYPE S : white or cream boot


Order separated

P/N	Optical ferrule		Spring	Bayonet boot				Reducer	Insertion & Extraction Tooling
	Ferrule	Body		Type	Boot	Bayonet	O-ring		
ELIO20WELA	ceramic	metal	Stainless steel	L	Elastomer	Composite	Elastomer	NO	80WV-0059A
ELIO20WESA	ceramic	metal	Stainless steel	S	Elastomer	Composite	Elastomer	NO	80WV-0059A
ELIO20NELA	ceramic	metal	Stainless steel	L	Elastomer	Composite	N/A	NO	80WV-0059A
ELIO20NESA	ceramic	metal	Stainless steel	S	Elastomer	Composite	N/A	NO	80WV-0059A
ELIO20NENA	ceramic	metal	Stainless steel	N	N/A	Composite	N/A	NO	80WV-0060A

See EN 4531-201 for dimensions

Country FR	Jurisdiction & Control List NOT LISTED
---------------	---

P/N : SEE TABLE

C	25/07/16	Updated: Rear face insulator and P/N SEE TABLE			--
ISS	DATE	Latest modification - by:		F.LECOMTE	MOD N°
Designed by:		-	Date:- I	CUSTOMER DRAWING	
TITLE		ELIO OPTICAL CONTACT - Ø2mm FOR FIBER OF TYPE E (9/125µm Singlemode)			
Scale 5/1		General linear Tolerances: ± 0.2		NPRDS / PROJECT ELIO	
SOURIAU		WWW.SOURIAU.COM			This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT A2	SOURIAU DRG N° ELIO20XEXA-C01				SHEET 1 / 1