
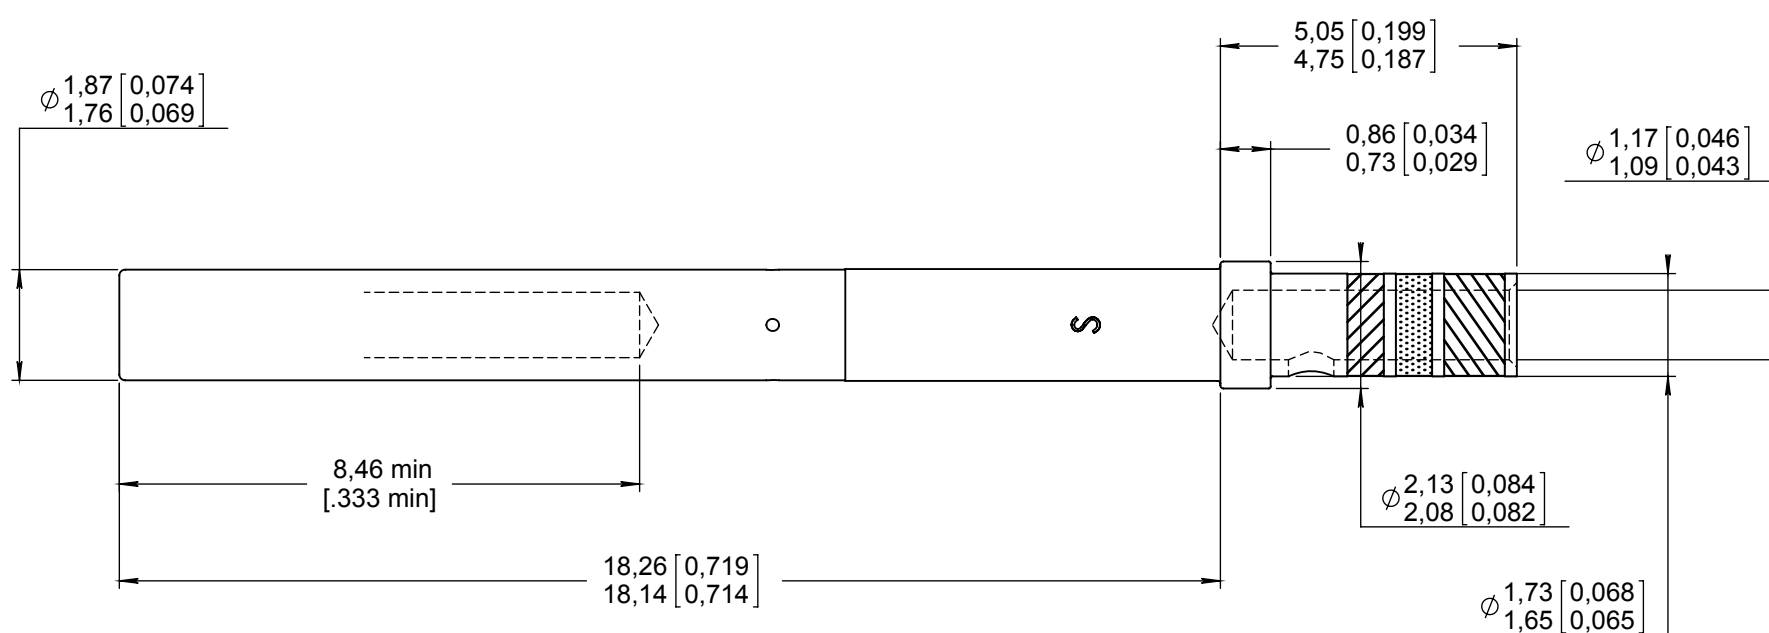


Series  
DSX

SIZE 20HD CRIMP RECEPTACLE CONTACT  
WIRE SIZE AWG 20-22-24  
COMPLIANT TO M39029/12-149

Issue:  
Dec. 03, 2013

Page  
1/1

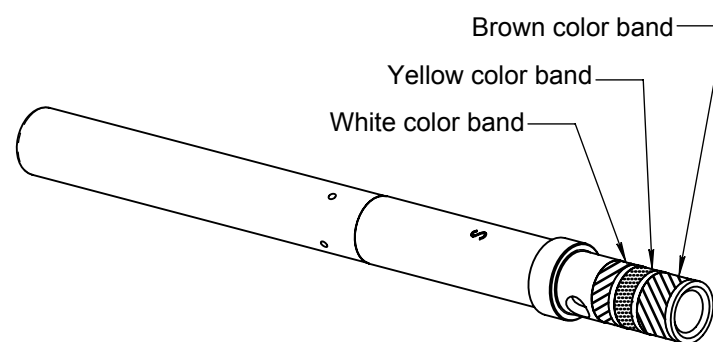

**MATERIAL :**

- BODY CONTACT : BERYLLIUM COPPER PER ASTM-B-196 HEAT TREATED HARDNESS 380-420 HV  
BARREL ANNEALED HARDNESS 120-140 HV V
- PROTECTIVE SLEEVE : PASSIVATED STAINLESS STEEL AISI 305

**FINISH :**

- BODY CONTACT : GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 50 MICROINCHES OVER NICKEL PLATE PER QQ-N-290

**WIRES ACCOMODATED :** AWG 20-22-24

INSULATOR DIAMETER : .071 MAX (1,80)

STRIP LENGHT : .158 (4,00)

**TOOLING**

CRIMPING TOOL : M22520/2-01 (RADIALL 282 281)

SELECTOR POSITION : 7 FOR AWG 20

6 FOR AWG 22


5 FOR AWG 24

POSITIONER : M22520/2-08 (RADIALL 282 971)

INSERTION/EXTRACTION TOOL : M81969/1-02 (RADIALL 282 886)

SPL RADIALL INS. 282 881 / EXT. 282 891

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 0.36 g

CREATION				
PEN: /				
NOM: FALETTI				
DATE: Mar. 22, 1985	Dec. 03, 13	Add M39029/12-149 in the title	Moutault	Dupuis
APPR.: /	Aug. 05, 08	REDRAWN	VALGRESY	/
	Issue	Revisions	Name	Approved